

HIGH PERFORMANCE LINE

# EXTREME® RUBBER DOORS

Models EPR-10 and EPR-20

## EXTREME™ PERFORMANCE RUBBER DOOR PRODUCT SELECTION CHARTS

**MODEL  
EPR-20  
SPRINGLESS**

**MODEL EPR-10 HIGH PERFORMANCE**

SIZE LIMITS		20'W x 20'H	20'W x 20'H	30'W x 30'H	47'W x 45'H	25'W x 30'H
<b>OPERATION</b>	Manual Operation	x				
	Motor Operation		x	x	x	x
<b>OPENING SPEED<sup>1</sup></b>	Measured in inches per second		15 - 60"	16 - 20"	10 - 12"	16 - 30"
<b>CYCLE RATING (,000)</b>	Counter-balance spring assembly Springless EPR-20	50	100	50	50	unlimited, warrantied 2 yrs
	200,000 cycle springs option <sup>2</sup>	x	x	x	x	
<b>SPRINGLESS DESIGN</b>	Direct connect inertia brake mounted on the drive barrel shaft					x
<b>HEADROOM CLEARANCE</b>		25"	30"	33"	53"	<= 10'H - 18" <= 15'H - 25" <= 30'H - 33"
<b>OPERATORS</b>	Standard gear head		15 - 30"/sec.	x	x	
	Gear head with inverter drive soft start, soft stop		40 - 60"/sec.			x
<b>CONTROL PANELS</b>	Relay logic		x	x	x	
	PLC (available with std. GH, included with inverter drive)		x	x	x	x
<b>TYPE OF CURTAIN</b>	¼" black SBR rubber with polyester core weave	x	x	x	x	x
<b>REVERSING EDGE</b>	Pressure-sensitive air wave edge. Also thru-beam photoelectric sensor.		x	x	x	x
<b>ACTIVATION</b>	Remotes, pull cords, loop detectors, etc.		x	x	x	x
<b>IMPACTABILITY</b>	NEWGEN® Guide and CurtainLok™ System, knock-away bottom bar	x	x	x	> 35'W, 25'H consult factory	x
<b>WARRANTY</b>	Two years on parts and workmanship, limited lifetime on curtain and NEWGEN Guide	x	x	x	x	x


1 Speed will vary depending on door size. Refer to chart on reverse. Consult factory when product details are critical.

2 Availability of 200,000 cycle springs dependent on door size. Consult factory when product details are critical.


The dimensions featured on this sheet are provided as a guide.

# HIGH PERFORMANCE LINE **EXTREME® RUBBER DOORS** Models EPR-10 and EPR-20

## COUNTER-BALANCE SPRING ASSEMBLY MODEL EPR-10

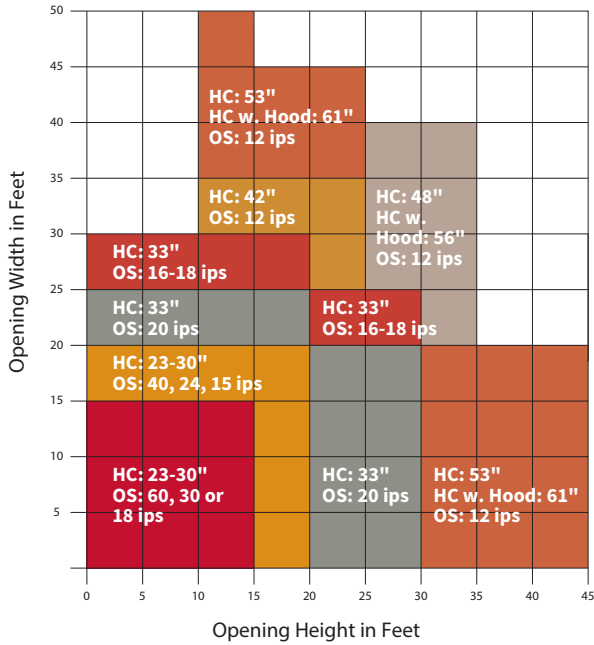


## SPRINGLESS CYCLE DUTY DESIGN MODEL EPR-20

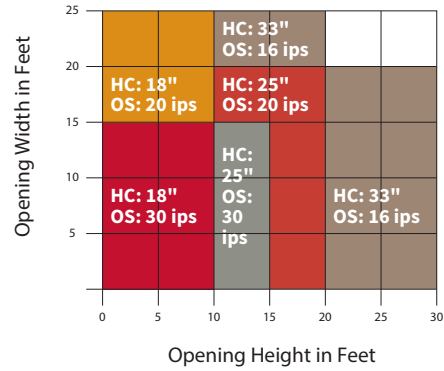


Dimensions in Inches

HC = Headroom Clearance  
OS = Opening Speed  
ips = inches per second

## COUNTER-BALANCE SPRING ASSEMBLY

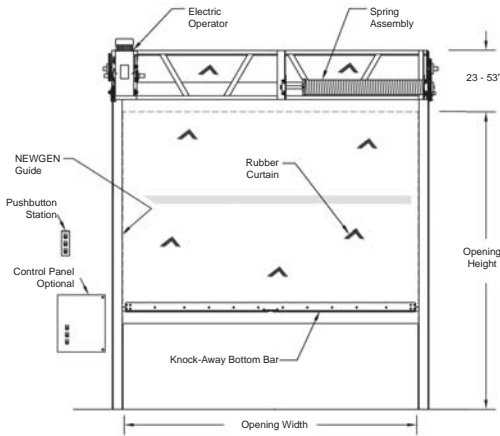

## SPRINGLESS CYCLE DUTY DESIGN

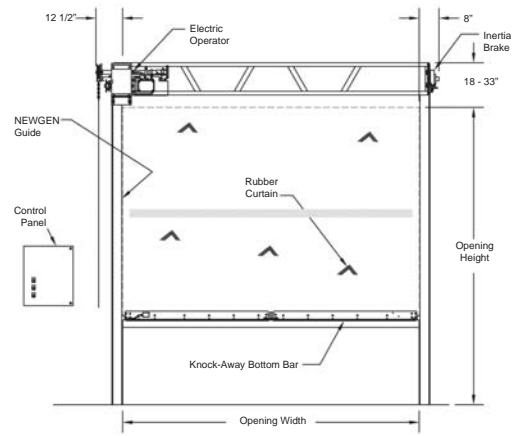

The dimensions featured on this sheet are provided as a guide. Please contact the factory for exact dimensions for your closure.

## CUSTOM-DESIGNED SOLUTIONS

Our experienced Architectural Design Support Team can customize our products to fit your specific application. Call 800.233.8366 ext. 4551 • ads@cornelliron.com