

CORNELL

Pocket Door for Side Folding Grilles and Closures



Pocket Door shown with optional white powder coat finish

Cornell offers a door and frame to neatly finish Side Folding Grille pocket openings. Both the door and frame are powder coated gray as standard. Many additional color options are available.

Pocket Door for Side Folding Closures & Grilles

Specification

Part 2 Products: 2.1 Materials

A. Door:


1. **Material:** A36 HR steel
2. **Thickness:** USS 12-gauge
3. **Finish:** Baked on organic powder coated finish, minimum 2-1/2 mils cured film thickness with pencil hardness rated at H or better per ASTM-D-3363; Cornell standard gray (or other stock color as selected by Architect).
4. **Size:** Rough opening minus 13/16"

B. Frame:


1. **Material:** A36 HR steel
2. **Thickness:** USS 12-gauge steel
3. **Finish:** Baked on organic powder coated finish, minimum 2-1/2 mils cured film thickness with pencil hardness rated at H or better per ASTM-D-3363; color to match door.
4. **Size:** Overlaps opening 2" with a 5/8" projection off wall

C. Hinges: 3" non-mortise type

D. Lock: 1" security mortise cylinder

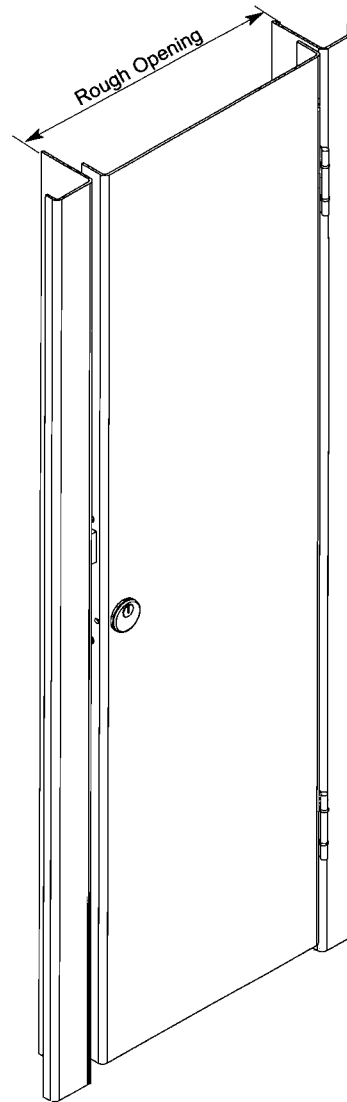

ISOMETRIC VIEW

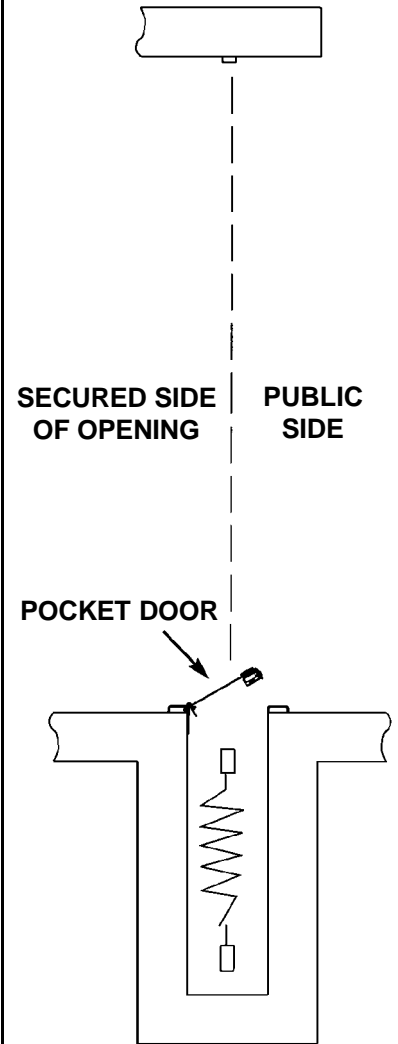

PLAN OF OPENING

Size Limitations

The Pocket Door is designed for the following rough opening sizes:

	<u>Minimum Width</u>	<u>Maximum Width</u>	<u>Minimum Height</u>	<u>Maximum Height</u>
Side Folding Grille	8"	18"	3'	12'
Side Folding Closure	10"	18"	3'	12'

The maximum height of the pocket door is 12'-0" or 12'-0 1/8" height to underside of track.

Rolling Door Specialists

CORNELL

An ISO 9002 Registered Firm

Crestwood Industrial Park Mountaintop, PA 18707

TEL 800.233.8366 • Engineering Design Support - Ext. 551 or 641

FAX 800.526.0841 • www.cornelliron.com

©10/2002 Cornell Iron Works