

# COUNTER FIRE DOOR COMPARISON CHART

Models ERC10 & ERC11 (SmokeShield®)


Previous Counter Fire Door Chassis-Style Configuration	VS	New Counter Fire Door* Tube Motor Operation
11.5"	Headroom Requirement	8.5"
22" without motor dimensions 25" with motor dimensions	Backroom Requirement	8"
Unfinished	Guide Fasteners	Powdercoated to Match Guides
Standard Graduated	Barrel Rings	Low-Profile
Standard Adds 1/2" Headroom	Astragal	Optional - negates the additional 1/2" headroom requirement if not selected

*The new Counter Fire Door is available in manual push up and manual crank operation, as well as tube and chassis operators. FireGard (thermal activation) and AlarmGard (electrical activation) closing systems are also available on the new Counter Fire Door.*

*\*Information is accurate for most configurations.*

# COUNTER FIRE DOOR COMPARISON CHART

Models ERC10 & ERC11 (SmokeShield®)

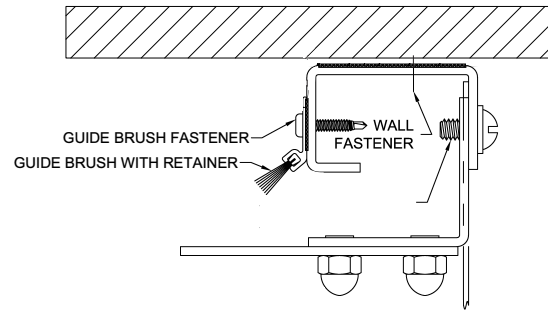

**Previous Counter Fire Door**  
Chassis-Style Configuration



Visibly Mounted to Exterior of Guides

**VS**

UL Listed Smoke Seal

**New Counter Fire Door\***  
Tube Motor Operation

Hidden / Mounted to Interior of Guides

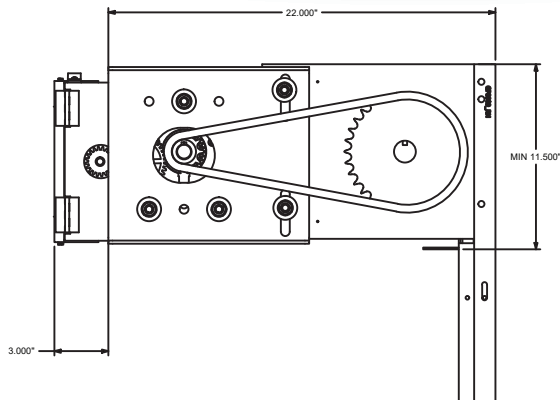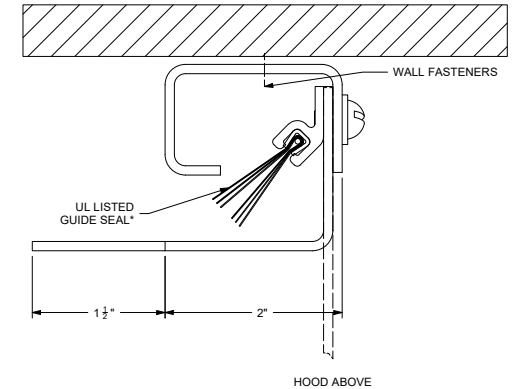

11.5"


22" without motor dimensions  
25" with motor dimensions

FireGard Headroom

8.5"

FireGard BackRoom


8"

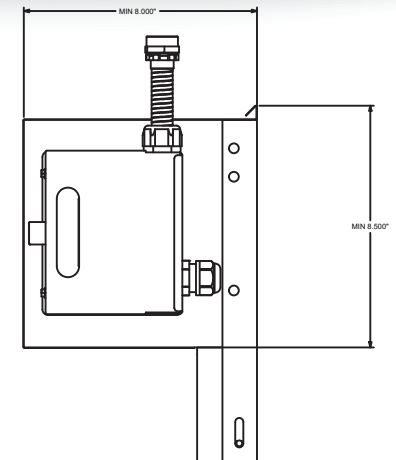

Stops Exposed below Hood

Bottom Bar / Door Stops

Flush with Hood

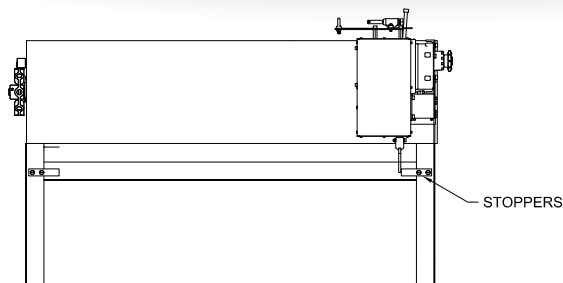

BOTTOM BAR FLUSH WITH HEADBOX, DIM = 0.500" WITH OPTIONAL ASTRAGAL

