MOTOR OPERATOR

ALARMGARD® TUBE MOTOR OPERATOR

ROLLING FIRE DOORS & COUNTER FIRE SHUTTERS

AlarmGard[®] Tube Motor Operators are concealed in the shaft assembly, making them ideal for openings with tight clearances or when you need to conceal the operator drive components without adding a bulky and unsightly motor cover. The AlarmGard Tube motor operator can be used on Fire Doors or Counter Fire Shutters.

Features and Benefits

- Convenience of motor operation in a low profile, concealed design.
- ► Auto-Reset and selectable Auto-Open.
- Available with or without battery back up.
- UL 325 compliant and UL 864 Listed motor assembly.
- ▶ Rated for up to 10 cycles per day.
- Electrical Connections from the operator to wall mounted control panel is plug and play.
- Internal fail-safe release device and internal centrifugal governor.

Product Application Requirements

An AlarmGard tube motor can operate a fire door or a fire counter shutter up to approximately 120 ft².*

*Size limit varies by door configuration and gauge required. **Special order - additional lead time applies.





Technical Specifications

Input Voltage • • • • • • • • • • • • 115 VAC/60 Hz 230 VAC/60 Hz 230 VAC/50 Hz
Activation Input •••••••••••••24 V
Phase ••••• 1
Duty · · · · · · · · · up to 10 cycles/day
Auxiliary Manual Operation ••••• No





800.233.8366 cornelliron.com CornellCookson, Inc. is an ISO 9001:2015 registered company 1.2019


Technical Drawings

AlarmGard[®] Tube Motor Front View AlarmGard[®] Tube Motor Side View

Standard AlarmGard® Motor Operator Side View

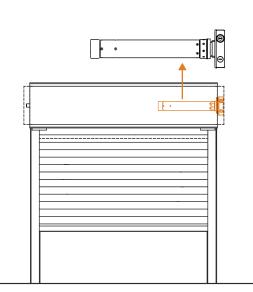


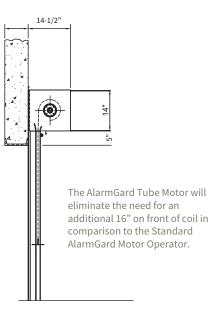

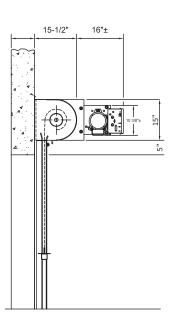

Motor Control Panel

Battery Back Up Motor Control Panel

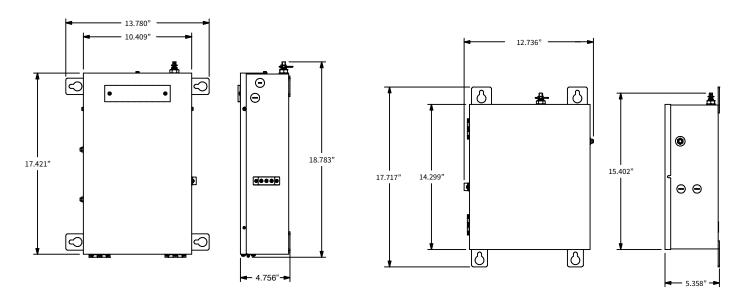

CUSTOM-DESIGNED SOLUTIONS

Our experienced Architectural Design Support Team can customize our products to fit your specific application. Call 800.233.8366 ext. 4551 • architecturaldesignsupport@cornellcookson.com



800.233.8366 | cornelliron.com CornellCookson, Inc. is an ISO 9001:2015 registered company 1.2019