


SAFETYGARD UL325 LIGHT CURTAIN

For Service Doors, VertiStack® Clear Door, Insulated Doors, Counter Doors and Grilles

RELIABLE NON-CONTACT SAFETY SOLUTION

The SafetyGard UL325 Approved Light Curtain is the perfect non-contact primary entrapment device that prevents damage to an object in the door's pathway in addition to minimizing damage to the closure itself.

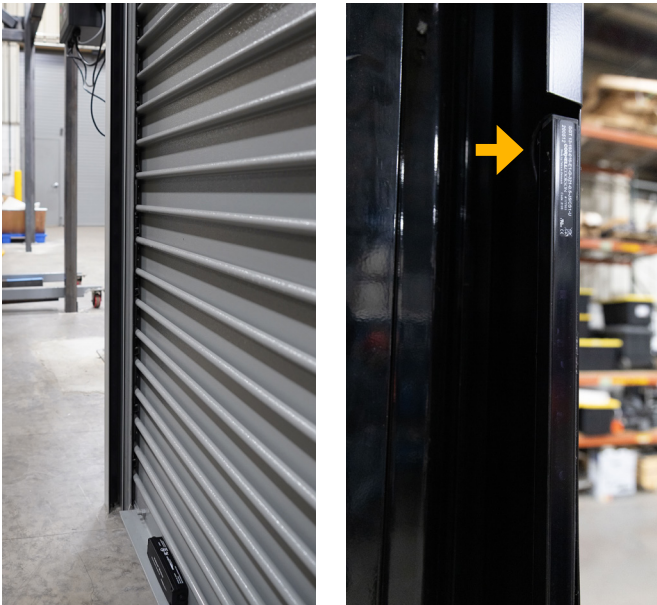

OPTIONS

- ▶ Available in 3' and 6', providing more significant coverage than a photo eye. The size will depend on the height of the opening.

ADDITIONAL FEATURES

- ▶ Improved aesthetics by eliminating the visibility of the sensing edge in the opening. It protrudes only 1 1/2" from the guide, offering minimal disruption and a clean look.
- ▶ Dynamic sequential blanking to eliminate the light curtain being triggered by door deflection due to wind.
- ▶ The extruded mounting channel easily attaches to the guide design, allowing for easy installation.



LIGHT CURTAIN DIMENSIONS

