


FIRE SAFETY CLOSURES

# SMOKESHIELD™ FABRIC SMOKE AND FIRE

Model ERF20


## FACE OF WALL MOUNT

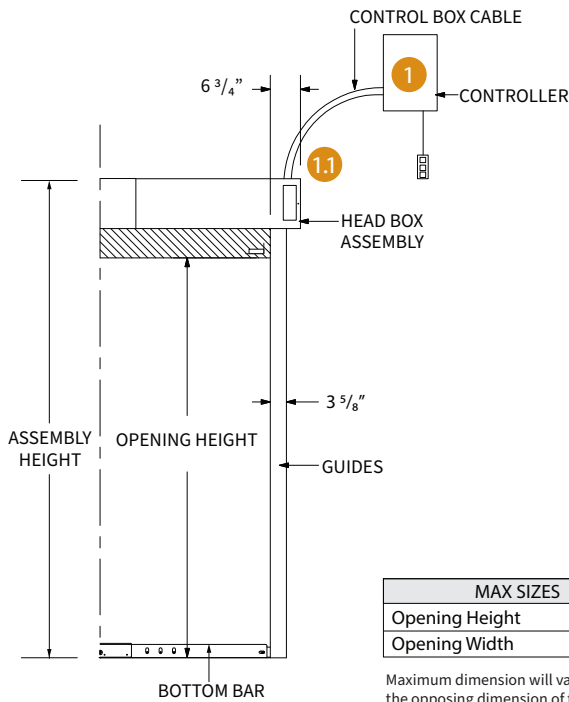


**1 CONTROLLER**

Is Remotely Mounted
115vac, Single Phase, 50/60hz
Battery Back-Up
12" x 17" x 5 1/2"

### 1.1 HEAD BOX DETAILS

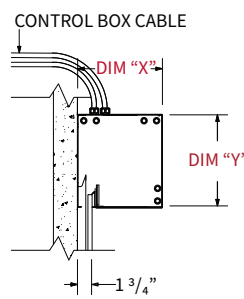


### BOTTOM BAR SIDE VIEW




Clear Opening Height	DIMENSION X	DIMENSION Y	
		Opening Width ≤ 19FT	Opening Width ≥ 19FT
11'	10"	11"	17"
16'	11"	12"	18"
20'	12"	13"	19"

## FACE OF WALL MOUNT GUIDE DETAILS

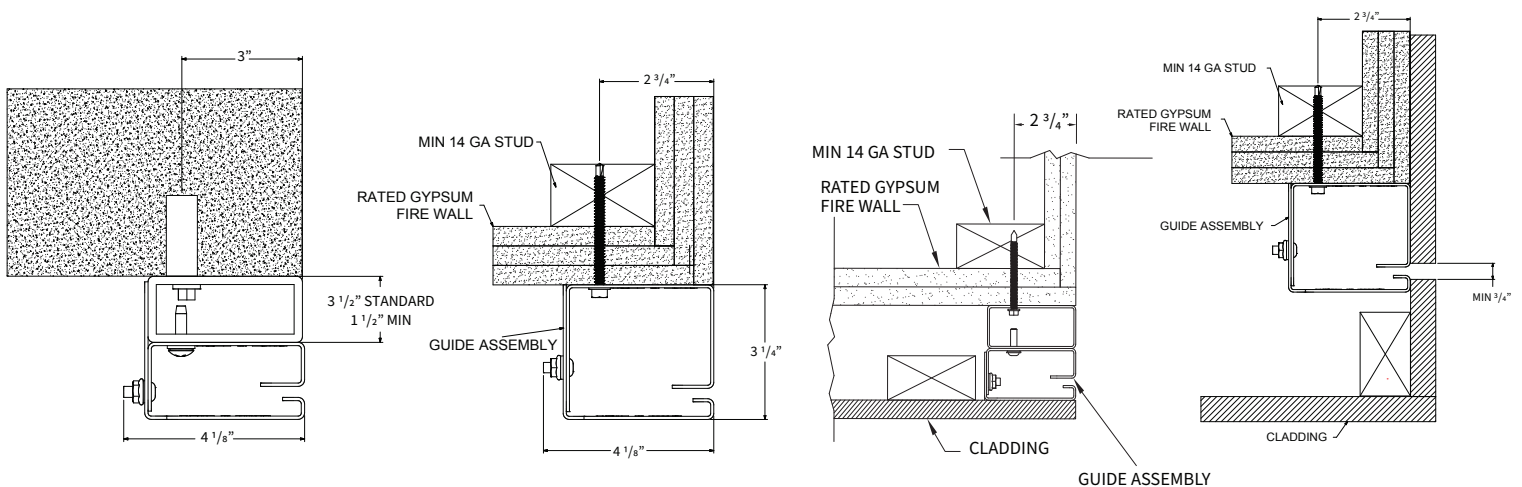


**UNDER LINTEL BETWEEN JAMBS MOUNT**

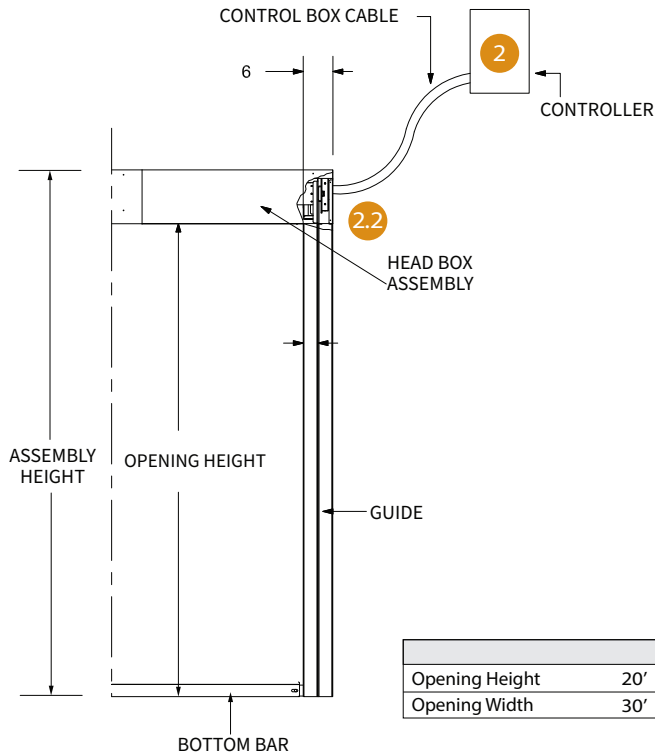


**2**

CONTROLLER
Can be Remotely Mounted
115vac, Single Phase, 50/60hz
Battery Back-Up
12" x 17" x 5 1/2"
Standard Three-Button Switch

**2.2 HEAD BOX DETAILS**

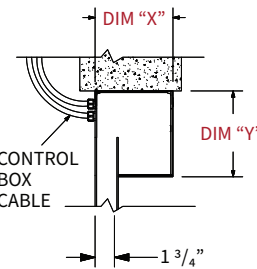



**BOTTOM BAR SIDE VIEW**



Opening Height	20'
Opening Width	30'

Clear Opening Height	DIMENSION X	DIMENSION Y	
		Opening Width ≤ 19FT	Opening Width > 19FT
11'	10"	11"	17"
16'	11"	12"	18"
20'	12"	13"	19"

**BETWEEN JAMBS MOUNT GUIDE DETAILS**

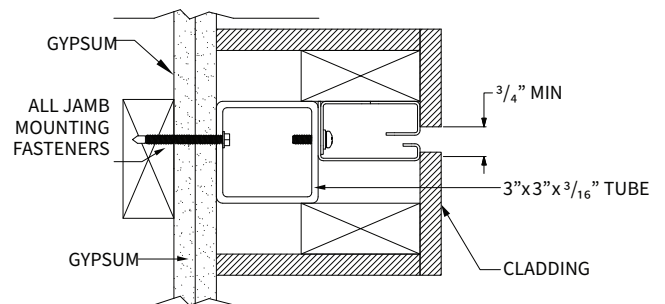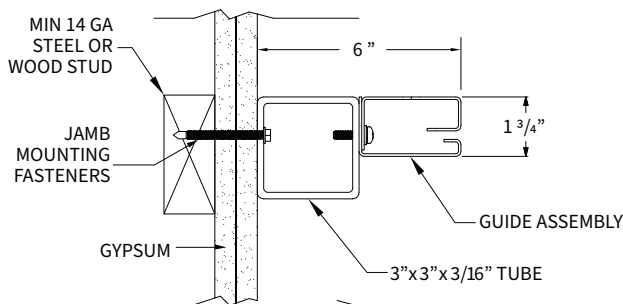

The dimensions featured on this sheet are provided as a rough guide for planning purposes. Exact dimensions cannot be provided until field conditions and all options are confirmed. Once field conditions are confirmed, please visit our website at [www.cornelliron.com/drawings](http://www.cornelliron.com/drawings) to generate custom drawings on demand for your specific opening.

**CUSTOM-DESIGNED SOLUTIONS**

Our experienced Architectural Design Support Team can customize our products to fit your specific application.

[architectdoorhelp.com](http://architectdoorhelp.com)