SMOKESHIELD™ ELEVATOR

Model ERF10

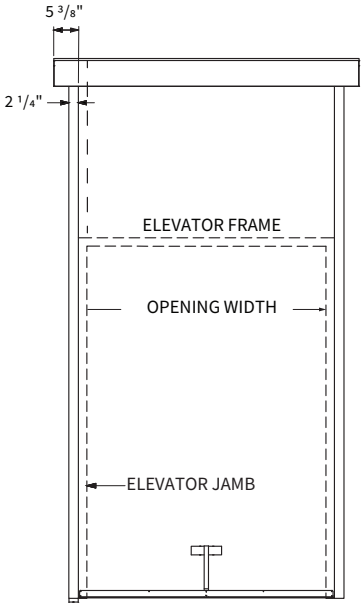

BELOW CEILING

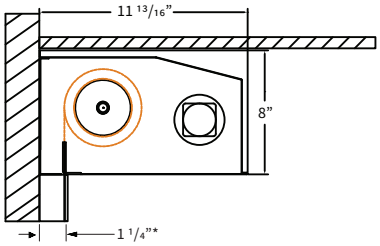

FLUSH WITH CEILING

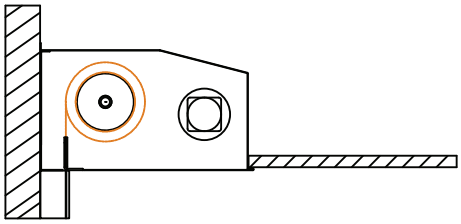

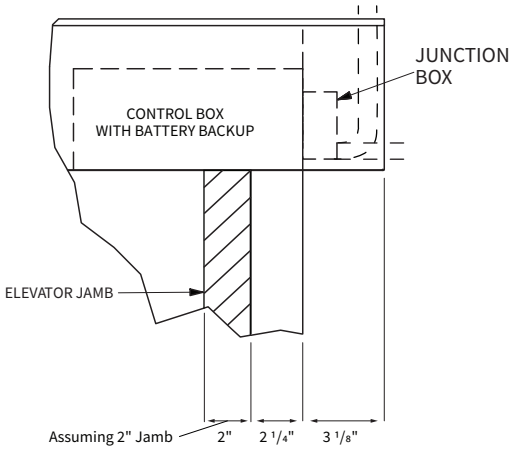

*If a packoff is needed for installation, this dimension will increase.

MAX SIZES

WIDTH - 12 FT

HEIGHT - 12 FT

Assumes average
Elevator jamb width of 2"

Complies with:

- IBC 2003 – PRESENT
- ICC-ES Report AC - 77

Listed:

- UL 1784
- UL 325
- UL 864
- ASTM E84
- California State Fire Marshal

STRUCTURAL INFO

1. Vertical jambs support the weight of the headbox assembly containing the barrel, curtain, motor and controller.
2. Headbox attached to wall at these 2 points.

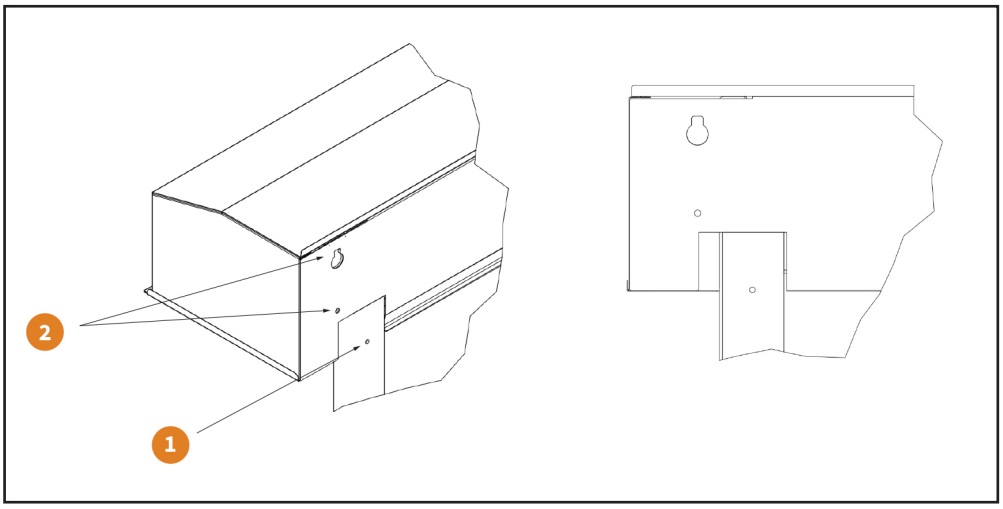

NOTE: This design requires back to back studs adjacent to vertical elevator jambs

STANDARD GUIDE OPTIONS - INTERIOR MOUNT ONLY

OFFSET GUIDE (EXPOSED)

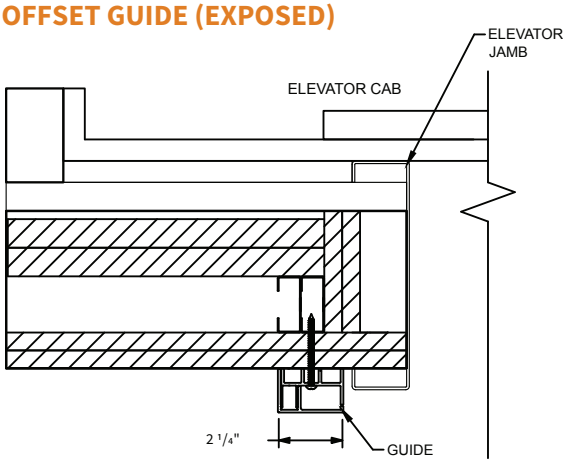

OFFSET GUIDE (UNDER FASCIA)

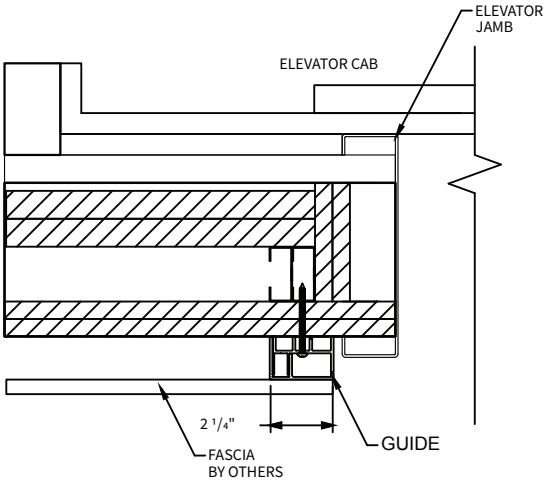

OVERFRAME (EXPOSED)

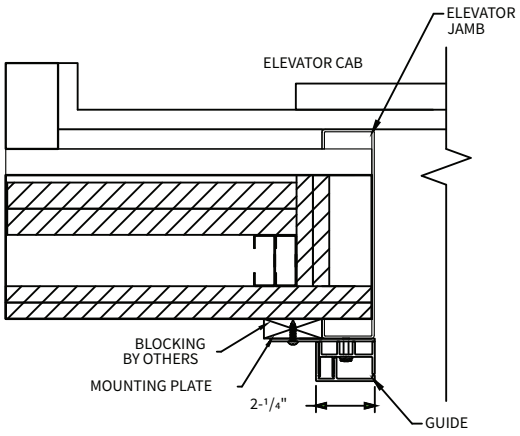

OVERFRAME (UNDER FASCIA)

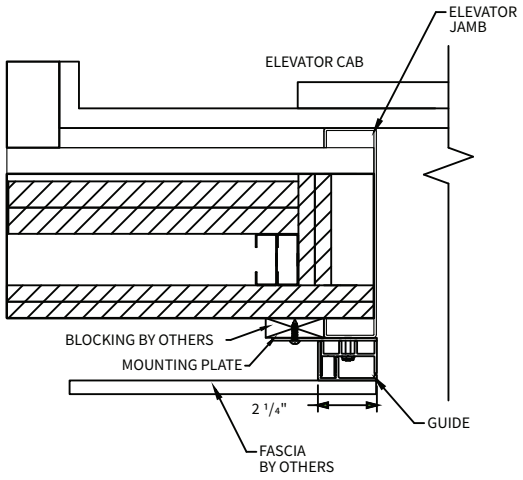

Please Note: Curtains exceeding 70" may require vertical seaming.

CUSTOM-DESIGNED SOLUTIONS

Our experienced Architectural Design Support Team can customize our products to fit your specific application.
Call 800.233.8366 ext. 4551 • architecturaldesignsupport@cornellcookson.com